

Rules for the Certification of Lifts and Escalators for Passengers and Crew Members

Effective from 1/1/2026

GENERAL TERMS AND CONDITIONS
OF EMIRATES CLASSIFICATION SOCIETY – L.L.C – O.P.C (TASNEEF)
EFFECTIVE AS OF 1 APRIL 2025

DEFINITIONS

Administration	means the government of the state whose flag the Ship is entitled to fly or under whose authority the Ship is authorised to operate in the specific case.
Client	means the interested party and any other party who requires the Services.
Certificate of Classification	means a certificate of classification, issued by a Society and the certificate confirms that the vessel's structure, machinery, and equipment meet the society's specific technical rules and regulations.
Interested Party	means the party, other than the society, having an interest in or responsibility for the Ship, product, plant or system subject to classification or certification (such as the owner of the Ship and his representatives, the Ship builder, the engine builder or the supplier of parts to be tested) who requests the Services or on whose behalf the Services are requested.
Owner	means the registered owner, the Ship owner, the manager or any other party with the responsibility, legally or contractually, to keep the Ship seaworthy or in service, having particular regard to the provisions relating to the maintenance of class laid down in part a, chapter 2 of the rules for the classification of Ships or in the corresponding rules indicated in the specific rules.
Register of Ships	means a register book, also known as a Register of Ships, is a comprehensive record of vessels that are classified by a society.
Rules	means the documents below issued by the Society: <ul style="list-style-type: none"> a. Rules for the classification of Ships or other special units. b. Complementary rules containing the requirements for certification of products, plants, systems and other or containing the requirements for the assignment of additional class notations. c. Rules for the application of statutory rules, containing the rules to perform the duties delegated by administrations. d. Guides to carry out particular activities connected with Services. e. Any other technical document, as for example rule variations or interpretations.

GENERAL TERMS AND CONDITIONS
OF EMIRATES CLASSIFICATION SOCIETY – L.L.C – O.P.C (TASNEEF)
EFFECTIVE AS OF 1 APRIL 2025

DEFINITIONS

Administration	means the government of the state whose flag the Ship is entitled to fly or under whose authority the Ship is authorised to operate in the specific case.
Client	means the interested party and any other party who requires the Services.
Certificate of Classification	means a certificate of classification, issued by a Society and the certificate confirms that the vessel's structure, machinery, and equipment meet the society's specific technical rules and regulations.
Interested Party	means the party, other than the society, having an interest in or responsibility for the Ship, product, plant or system subject to classification or certification (such as the owner of the Ship and his representatives, the Ship builder, the engine builder or the supplier of parts to be tested) who requests the Services or on whose behalf the Services are requested.
Owner	means the registered owner, the Ship owner, the manager or any other party with the responsibility, legally or contractually, to keep the Ship seaworthy or in service, having particular regard to the provisions relating to the maintenance of class laid down in part a, chapter 2 of the rules for the classification of Ships or in the corresponding rules indicated in the specific rules.
Register of Ships	means a register book, also known as a Register of Ships, is a comprehensive record of vessels that are classified by a society.
Rules	means the documents below issued by the Society: <ul style="list-style-type: none"> a. Rules for the classification of Ships or other special units. b. Complementary rules containing the requirements for certification of products, plants, systems and other or containing the requirements for the assignment of additional class notations. c. Rules for the application of statutory rules, containing the rules to perform the duties delegated by administrations. d. Guides to carry out particular activities connected with Services. e. Any other technical document, as for example rule variations or interpretations.

Services	means the activities described in Article 1 below, rendered by the Society upon request made by or on behalf of the Interested Party.
Ship	means ships, boats, craft and other special units, as for example offshore structures, floating units and underwater craft.
Society	means Emirates Classification Society LLC OPC and/or its affiliated entities providing the Services.
Surveyor	means technical staff acting on behalf of the society in performing the Services.
UAE	means United Arab Emirates.

ARTICLE 1

- 1.1 The purpose of the Society is, among others, the classification and certification of Ships and the certification of their parts and components.
- 1.2 The Society (a) sets forth and develops Rules; (b) publishes the Register of Ships; and (c) issues certificates, statements and reports based on its survey activities.
- 1.3 The Society also takes part in the implementation of national and international rules and standards as delegated by various Governments.
- 1.4 The Society carries out technical assistance activities on request and provides special services outside the scope of classification, which is regulated by these general conditions unless expressly excluded in the particular contract.

ARTICLE 2

- 2.1 The Rules developed by the Society reflect the level of its technical knowledge at the time they are published. Therefore, the Society, though committed, also through its research and development services, to continuous updating, does not guarantee they meet state-of-the-art science and technology at the time of publication or that they meet the Society's or others' subsequent technical developments.
- 2.2 The Interested Party is required to know the Rules on the basis of which the Services are provided. With particular reference to Classification Services, special attention is to be given to the Rules concerning class suspension, withdrawal and reinstatement. In case of doubt or inaccuracy, the Interested Party is to promptly contact the Society for clarification. The Rules for Classification of Ships are published on the Society's website: www.tasneefmaritime.ae
- 2.3 The Society exercises due care and skill:
 - (a) in the selection of its Surveyors; and
 - (b) in the performance of its Services, taking into account the level of its technical knowledge at the time the

Services are performed.

- 2.4 Surveys conducted by the Society include, but are not limited to, visual inspection and non-destructive testing. Unless otherwise required, surveys are conducted through sampling techniques and do not consist of comprehensive verification or monitoring of each component of the Ship or of the items subject to certification. The surveys and checks made by the Society, either on board Ships or with remote techniques, do not necessarily require the constant and continuous presence of the Surveyor. The Society may also commission laboratory testing, underwater inspection and other checks to qualified service suppliers, who will carry out these duties under their responsibility. Survey practices and procedures are selected by the Society based on its experience and knowledge and according to generally accepted technical standards in the sector.

ARTICLE 3

- 3.1 The class assigned to a Ship, like the reports, statements, certificates or any other document or information issued by the Society, reflect the discretionary opinion of the Society concerning compliance, at the time the Service is provided, of the Ship or product subject to certification, with the applicable Rules (given the intended use and within the relevant time frame).
- 3.2 The Society is under no obligation to make statements or provide information about elements or facts which are not part of the specific scope of the Service requested by the Interested Party or on its behalf.
- 3.3 No report, statement, notation on a plan, review, Certificate of Classification, document or information issued or given as part of the Services provided by the Society shall have any legal effect or implication other than a representation that, on the basis of the checks made by the Society, the Ship, structure, materials, equipment, machinery or any other item covered by such document or information meet the Rules. Any such document is issued solely for the use of the Society, its committees and clients or other duly authorised bodies and for no other purpose. Therefore, the Society cannot be held liable for any act made or document issued by other parties on the basis of the statements or information given by the Society. The validity, application, meaning and interpretation of a Certificate of Classification, or any other document or information issued by the Society in connection with its Services, are governed by the Rules of the Society, whom is the sole subject entitled to make such authentic interpretation. Any disagreement on technical matters between the Interested Party and the Surveyor in the carrying out of his functions shall be raised in writing as soon as possible with the Society, which will settle any divergence of opinion or dispute.
- 3.4 The classification of a Ship, or the issuance of a certificate or other document connected with classification or certification and in general with the performance of Services by the Society shall have the validity conferred upon it by the Rules of the Society at the time of the assignment of class or issuance of the certificate; in no case shall it amount to a statement or warranty of seaworthiness, structural integrity, quality or fitness for a particular purpose or service of any Ship, structure, material, equipment or machinery inspected or tested by the Society.
- 3.5 Any document issued by the Society in relation to its activities reflects the condition of the Ship or the subject of certification or other activity at the time of the check.
- 3.6 The Rules, surveys and activities performed by the Society, reports, certificates and other documents issued by

the Society are in no way intended to replace the duties and responsibilities of other parties including, without limitation, Governments, designers, ship builders, manufacturers, repairers, suppliers, contractors or sub-contractors, Owners, operators, charterers, underwriters, sellers or intended buyers of a Ship or other product or system surveyed.

- 3.7 These documents and activities do not relieve such parties from any fulfilment, warranty, responsibility, duty or obligation (also of a contractual nature) expressed or implied or in any case incumbent on them, nor do they confer on such parties any right, claim or cause of action against the Society. With particular regard to the duties of the Owner, the Services undertaken by the Society do not relieve the Owner of his duty to ensure proper maintenance of the Ship and ensure seaworthiness at all times. Likewise, the Rules, surveys performed, reports, certificates and other documents issued by the Society are intended neither to guarantee the buyers of the Ship, its components or any other surveyed or certified item, nor to relieve the seller of the duties arising out of the law or the contract, regarding the quality, commercial value or characteristics of the item which is the subject of transaction.
- 3.8 In no case, therefore, shall the Society assume the obligations incumbent upon the above-mentioned parties, even when it is consulted in connection with matters not covered by its Rules or other documents.
- 3.9 In consideration of the above, and within the limits of liability under Article 5 below, the Interested Party undertakes to relieve and hold harmless the Society from any third party claim, as well as from any liability in relation to the latter concerning the Services rendered, where these are attributable to the Interested Party.
- 3.10 Insofar as they are not expressly provided for in these General Conditions, the duties and responsibilities of the Owner and Interested Parties with respect to the Services rendered by the Society are described in the Rules applicable to the specific Service rendered.

ARTICLE 4

- 4.1 Any request for the Society's Services shall be submitted in writing and signed by or on behalf of the Interested Party. Such a request will be considered irrevocable as soon as received by the Society and shall entail acceptance by the applicant of all relevant requirements of the Rules, including these General Conditions. Upon acceptance of the written request by the Society, a contract between the Society and the Interested Party is entered into, which is regulated by the present General Conditions.
- 4.2 In consideration of the Services rendered by the Society, the Interested Party and the person requesting the service shall be jointly liable for the payment of the relevant fees and costs, even if the service is not concluded for any cause not pertaining to the Society. In the latter case, the Society shall not be held liable for non-fulfilment or partial fulfilment of the Services requested. In the event of non-payment of the invoice within the contractually agreed terms, the Society reserves the right to request, in addition to the full payment of the principal amount due and without the need for further formal notice, also:
- (a) Late payment interest at a rate of 5% per annum, calculated from the due date of the invoice until full payment is received, in accordance with the applicable laws in the United Arab Emirates or the country from where the invoice is issued. Any applicable VAT, taxes, or statutory levies shall be borne by the Client as per the laws

- of the respective jurisdiction;
- (b) full reimbursement of any costs incurred for debt recovery, including, but not limited to, legal fees, administrative expenses, and the costs of any extrajudicial actions; and
- (c) any additional amount due as compensation for damages suffered as a result of the delay or non-compliance, where documented.
- 4.3 The contract for the classification of a Ship or for other Services may be terminated and any certificates revoked at the request of one of the parties, subject to at least 30 days' notice to be given in writing. Failure to pay, even in part, the fees due for Services carried out by the Society will entitle the Society to immediately terminate the contract and suspend the Services.
- 4.4 The Society may withhold, suspend or withdraw any certificate, report or service in the event of non-payment of fees due to any member of the Society by the Client in relation to the entire business relationship between any member of the Society and the Client or by any other companies belonging to the same group as the Client. This also applies when the obligation to pay rests with a builder or with the Ship's previous Owner.
- 4.5 For every case of termination or suspension of the contract, the fees for the activities performed until the time of the termination or of the suspension shall be owed to the Society as well as the expenses incurred in view of activities already programmed; this is without prejudice to the right to compensation due to the Society as a consequence of the termination or of the suspension.
- 4.6 With particular reference to Ship classification and certification, unless decided otherwise by the Society, termination of the contract implies that the assignment of class to a Ship is withheld or, if already assigned, that it is suspended or withdrawn; any statutory certificates issued by the Society will be withdrawn in those cases where provided for by agreements between the Society and the flag State.

ARTICLE 5

- 5.1 In providing the Services, as well as other correlated information or advice, the Society, its Surveyors, servants or agents operate with due diligence for the proper execution of the activity. However, considering the nature of the activities performed (see Article 2), it is not possible to guarantee absolute accuracy, correctness and completeness of any information or advice supplied. Express and implied warranties are specifically disclaimed.
- 5.2 Therefore, subject to what provided for in Article 5.3 below, and also in the case of activities carried out by delegation of Governments, neither the Society nor any of its Surveyors will be liable for any loss, damage or expense of whatever nature sustained by any person, in tort or in contract, derived from carrying out the Services.
- 5.3 Notwithstanding the provisions in Article 5.1 above, should any user of the Society's Services prove that he has suffered a loss or damage due to any negligent act or omission of the Society, its Surveyors, servants or agents, then the Society will pay compensation to such person for his proved loss, up to, but not exceeding, five times the amount of the fees charged for the specific Services, information or opinions from which the loss or damage derives or, if no fee has been charged, a maximum of AED5,000 (Arab Emirates Dirhams Five Thousand only).
- 5.4 Where the fees charged are related to a number of Services, the amount of the fees will be apportioned for the purpose of the calculation of the maximum compensation, by reference to the estimated time involved in the

performance of the Service from which the damage or loss derives. Any liability for indirect or consequential loss, damage or expense is specifically excluded. In any case, irrespective of the amount of the fees charged, the maximum damages payable by the Society will not be more than AED 300,000 (Three Hundred Thousand Dirhams). Payment of compensation under this Article will not entail any admission of responsibility and/or liability by the Society and will be made without prejudice to the disclaimer clause contained in Article 5.

- 5.5 Any claim for loss or damage of whatever nature by virtue of the provisions set forth herein shall be made to the Society in writing, within the shorter of the following periods: THREE MONTHS from the date on which the Services were performed or THREE MONTHS from the date on which the damage was discovered. Failure to comply with the above deadline will constitute an absolute bar to the pursuit of such a claim against the Society.

ARTICLE 6

- 6.1 Any dispute, controversy, or claim arising out of or relating to these Rules, the Services of the Society, or the interpretation, breach, or termination thereof, shall first be referred to the parties' senior management for amicable resolution within thirty (30) days of written notice by either party.
- 6.2 If the dispute is not resolved amicably under Article 6.1, it shall be exclusively governed by and construed in accordance with the laws of the Emirate of Abu Dhabi and the applicable federal laws of the United Arab Emirates. The courts of Abu Dhabi shall have exclusive jurisdiction to settle any such dispute.

ARTICLE 7

- 7.1 All plans, specifications, documents and information provided by, issued by, or made known to the Society, in connection with the performance of its Services, will be treated as confidential and will not be made available to any other party other than the Owner without authorisation of the Interested Party, except as provided for or required by any applicable legislation from a competent authority. Information about the status and validity of class and statutory certificates, including transfers, changes, suspensions, withdrawals of class, conditions of class, operating conditions or restrictions issued against classed ships and other related information, as may be required, may be published on the website or released by other means, without the prior consent of the Interested Party.
- 7.2 Information about the status and validity of other certificates and statements may also be published on the website or released by other means, without the prior consent of the Interested Party.
- 7.3 Notwithstanding the general duty of confidentiality owed by the Society to its clients in Article 7.1 above, the Society's clients hereby accept that the Society will participate in the IACS Early Warning System which requires each Classification Society to provide other involved Classification Societies with relevant technical information on serious hull structural and engineering systems failures, as defined in the IACS Early Warning System (but not including any drawings relating to the Ship which may be the specific property of another party), to enable such useful information to be shared and used to facilitate the proper working of the IACS Early Warning System. The Society will provide its clients with written details of such information sent to the involved Classification Societies.
- 7.4 In the event of transfer of class, addition of a second class or withdrawal from a double/dual class, the Interested Party undertakes to provide or to permit the Society to provide the other Classification Society with all building plans and drawings, certificates, documents and information relevant to the classed unit, including its history file,

as the other Classification Society may require for the purpose of classification in compliance with the applicable legislation and relative IACS Procedure. It is the Owner's duty to ensure that, whenever required, the consent of the builder is obtained with regard to the provision of plans and drawings to the new Society, either by way of appropriate stipulation in the building contract or by other agreement.

- 7.5 In the event that the ownership of the Ship, product or system subject to certification is transferred to a new subject, the latter shall have the right to access all pertinent drawings, specifications, documents or information issued by the Society or which have come to the knowledge of the Society while carrying out its Services, even if related to a period prior to transfer of ownership.

ARTICLE 8

- 8.1 The Society shall not be obliged to perform any obligation towards the Client (including, without limitation, obligation to (a) perform, deliver, accept, sell, purchase, pay or receive money to, from or through a person or entity, or (b) engage in any other act) if this would be in violation of, inconsistent with or expose the Society to punitive measures under any United Nations resolutions and/or under any laws, regulations, decrees, ordinances, orders, demands, requests, rules or requirements of EU, United Kingdom, and/or United States of America and which relate to foreign trade controls, export controls, embargoes or international boycotts (applying, without limitation, to the financing, payment, insurance, transportation, delivery or storage of product and/or services) hereinafter referred to as "Trade Sanctions".
- 8.2 Recurring the above circumstances during the performance of the contract, the Society shall be entitled at its sole and absolute discretion:
- (a) to immediately suspend payment or performance of the Services which are the object of the contract until such;
 - (b) time as the Trading Sanctions are in force;
 - (c) to a full disengagement from the obligation affected by the Trading Sanctions, in the event that the inability to fulfill the said obligation persists until the term provided for the fulfilment hereunder, provided that where the relevant obligation relates to payments for activities and/or Services which have already been delivered, the affected payment obligation shall remain only suspended until such time as the Trading Sanctions no longer apply to the payment ; and/or
 - (d) to terminate the contract, without prejudice of the Society's rights pursuant to Article 4.

ARTICLE 9

Should any part of these General Conditions be declared invalid, this will not affect the validity of the remaining provisions.

ARTICLE 10

When the Society provides its Services to a consumer - i.e. a natural person who does not act within the scope of his business or professional activity - the following provisions do not apply Article 3 (as far as the Society is solely entitled to the authentic interpretation of the Rules); Article 4, (as far as the payment of the fees is also due for Services not

concluded due to causes not attributable to the Interested Party); Article 5 (as far as the exclusion of liability is concerned), and Article 6 (as far as the jurisdiction of a Board of Arbitrators based in Abu Dhabi is concerned).

ARTICLE 11

- 11.1 The Society and the Interested Party shall promote safety, protect human health and environment and create safe working conditions for their personnel.
- 11.2 The Interested Party shall guarantee that the working environment in which the Society's Surveyor will be required to work is adequate, safe and in all respect compliant with the applicable legislation and Rules and shall adopt all necessary measures to mitigate and/or control any relevant risk.
- 11.3 Furthermore, in accordance with the applicable legislation and Rules, the Interested Party shall provide the Society with complete and detailed information relevant to any actual or potential specific risk existing in the work areas where the Surveyor will be required to operate and relevant to the performance of the Services as well as with any specific safety measure that the Society's Surveyor is requested to comply with.
- 11.4 The Society reserves not to commence and/or to suspend the Services and/or to terminate the contract, claiming compensation for any damage occurred, if it considers that the safety requirements listed in this Article are not satisfactorily met.

INDEX

CHAPTER 1: GENERAL REQUIREMENTS AND FIELD OF APPLICATION

1.1	PREMISE	1
1.1.1	Field of application and general requirements	1
1.1.2	Certification and its validity	1
1.1.3	Equivalence of requirements and exceptions	1
1.1.4	Calculation methods	2
1.1.5	Modification of systems and/or installations	2
1.1.6	Testing	2
1.1.7	Existing installations	2
1.2	DEFINITIONS	2
1.2.1	Administration	2
1.2.2	Buffer	2
1.2.3	Lift	2
1.2.4	Traction drive lift	2
1.2.5	Positive drive lift	2
1.2.6	Re-levelling	2
1.2.7	Maritime authority	3
1.2.8	Lift car (Car)	3
1.2.9	Breaking load of a lifting cable	3
1.2.10	Safety cable	3
1.2.11	Lift well (Well)	3
1.2.12	Pit	3
1.2.13	Toe guard (Apron)	3
1.2.14	Guide rails	3
1.2.15	Sling	3
1.2.16	Interested Parties	3
1.2.17	Overspeed governor	3
1.2.18	Levelling	3
1.2.19	Pulley room	3
1.2.20	Lift machine	3
1.2.21	Safety gear	3
1.2.22	Instantaneous safety gear	3
1.2.23	Instantaneous safety gear with buffered effect	3
1.2.24	Progressive safety gear	3
1.2.25	Passengers	3
1.2.26	Rated load	3
1.2.27	Machine room	3
1.2.28	Escalator	3
1.2.29	Available car area	3
1.2.30	Surveyors	3
1.2.31	Vessels	3
1.2.32	Rated speed	3
1.2.33	Unlocking zone	3

CHAPTER 2: DESIGN CRITERIA OF LIFTS AND ESCALATORS

2.1	GENERAL	4
2.2	MASSES	4
2.2.1	General	4
2.2.2	Lift installations	4
2.3	DYNAMIC FORCES	4
2.4	STRESSES INDUCED BY DYNAMIC FORCES FOR LIFTS	6
2.5	PERMISSIBLE STRESSES AND DEFLECTIONS	6

CHAPTER 3: DESIGN CRITERIA OF LIFTS AND ESCALATORS

3.1	LIST OF REQUIRED DOCUMENTS	7
------------	---	----------

INDEX

CHAPTER 4: CONSTRUCTION CHARACTERISTICS OF THE INSTALLATION FOR LIFTS

4.1	LIFT CAR	8
4.1.1	General	8
4.1.2	Strength.....	8
4.1.3	Access doors.....	8
4.1.4	Clearances between car and inner surface of well, and between car and counterweight.....	8
4.1.5	Ventilation	8
4.2	GUIDE RAILS	8
4.3	COUNTERWEIGHT	9
4.4	LIFT WELL ENCLOSURES AND LANDING DOORS	9
4.4.1	Well enclosures	9
4.4.2	Landing doors.....	9
4.4.3	Extreme position of car, well top and bottom clearances.....	10
4.4.4	Ventilation	11
4.5	MACHINE ROOM	11

CHAPTER 5: SUSPENSION GEAR FOR LIFTS

5.1	REQUIREMENTS FOR SUSPENSIONS	12
5.2	STABILITY IN RESPECT OF SLIPPING	12
5.3	DISTRIBUTION OF LOAD BETWEEN THE CABLES OR THE CHAINS	12
5.4	REQUIREMENTS FOR CSBs	12

CHAPTER 6: MEANS OF ESCAPE FOR LIFTS

6.1	GENERAL	14
------------	----------------------	-----------

CHAPTER 7: CONTROL AND SAFETY DEVICES FOR LIFTS

7.1	GENERAL	15
7.2	SAFETY GEAR AND OVERSPEED GOVERNOR	15
7.3	BUFFERS	15
7.3.1	General	15
7.3.2	Stroke of the buffers	15
7.4	FINAL LIMIT SWITCHES	16
7.5	CLOSING AND CONTROL DEVICES	16
7.6	CONTROL CIRCUIT CONTACTS	16
7.7	CAR UNLOCKING AND EMERGENCY MANOEUVRE	16
7.8	INDICATING DEVICES	16
7.9	OPERATING DEVICES	16
7.10	OUT-OF-ORDER LIFTS	16
7.11	STOPPING DEVICE AND ALARM SIGNAL	16
7.12	RE-ACTIVATION OF LIFT SERVICE	17
7.13	END OF TRAVEL SAFETY DEVICES	17
7.14	SAFETY DEVICES IN CASE AN OBJECT IS MET DURING DOWNWARD MOTION OF THE CAR OR COUNTERWEIGHT	17
7.15	BRAKING SYSTEM	17
7.15.1	General provisions	17
7.15.2	Electro-mechanical brake.....	17

CHAPTER 8: MACHINERY FOR LIFTS

8.1	GENERAL	18
8.2	DRIVE OF THE CAR AND THE COUNTERWEIGHT	18
8.2.1	Electric lifts	18

INDEX

8.2.2	Hydraulic lifts	18
-------	-----------------------	----

CHAPTER 9: ELECTRICAL INSTALLATION FOR LIFTS

9.1	GENERAL.....	19
9.2	ELECTRICAL DEVICES.....	19
9.3	SUPPLY CIRCUITS.....	19
9.4	MEANS OF COMMUNICATION	19
9.5	EMERGENCY POWER SUPPLY	19
9.6	ALARM DEVICE.....	19
9.7	EMERGENCY LIGHTING.....	19
9.8	ELECTRICAL SAFETY DEVICES.....	19
9.9	OPENING OF THE EMERGENCY ESCAPE HATCH	19
9.10	OPENING OF ESCAPE HATCHES TO THE WELL.....	19
9.11	INSTALLATION OF ELECTRICAL CABLES IN THE WELL.....	19

CHAPTER 10: MATERIALS AND WELDED CONNECTIONS FOR LIFTS

10.1	GENERAL.....	20
------	--------------	----

CHAPTER 11: TESTS AND CHECKS ON BOARD FOR LIFTS

11.1	TESTS TO BE CARRIED OUT AT THE FIRST SURVEY	21
11.1.1	Electric lifts	21
11.1.2	Hydraulic lifts	21
11.2	TESTS TO BE CARRIED OUT AT PERIODICAL SURVEYS	22

CHAPTER 12: CERTIFICATION OF ESCALATORS

12.1	APPLICABLE STANDARDS.....	23
12.2	REQUIRED DOCUMENTS	23
12.3	SAFETY DEVICES AND MACHINERY	23
12.4	ELECTRICAL SYSTEM.....	23
12.5	MATERIALS AND WELDED CONNECTIONS.....	23
12.6	TESTS AND INSPECTIONS ON BOARD	23
12.7	CERTIFICATION	23

Cap. 1 – GENERAL REQUIREMENTS AND FIELD OF APPLICATION

1.1 PREMISE

1.1.1 Field of application and general requirements

These Rules apply to lifts and escalators for passengers and crew members, installed on board ships, with regard to the issue by TASNEEF of the certification mentioned under 1.1.2.

Chapters 1 and 2 apply in general to both lifts and escalators, Chapters 3 to 11 apply to lifts, while Chapter 12 applies to escalators.

These Rules also apply to the lifts of ships flying the , for the purpose of compliance with the provisions of the Italian “Regulations for the Safety of Navigation and Life at Sea” in force (Decree of the President of the Italian Republic no. 435 of 8 November 1991), if said ships were constructed on or after 21 April 1992, which was the date of entry into force of the above- mentioned Regulations (see Section V, Article 130).

At the discretion of TASNEEF and subject to the conditions that will be established in each case, these Rules may also be applied to lifts and escalators installed on drilling platforms or other similar vessels.

Compliance with these Rules for the above-mentioned purposes does not absolve Interested Parties from compliance with any regulations or instructions issued by the Administration of the State whose flag the ship is flying.

These Rules refer to electric lifts and, as far as applicable, to hydraulic lifts, permanently installed on board and consisting of a closed lift car, operated by means of cables, chains or hydraulic rams, sliding within rigid guide rails and used for transferring persons from one deck of a ship to another. The rated speed of the lift car is, in general, not to exceed 1,6 m/s.

For drum drive installations, the rated speed is generally to be limited to not more than 0,63 m/s.

Lifts designed for speeds exceeding 1,6 m/s or of different type, or the application of these Rules to installations on ships or non-self-propelled-craft not classified by TASNEEF will be specially considered by TASNEEF.

The components of the installations dealt with by these Rules which are permanently connected to the ship's structures, and the ship's structures which are affected by loads deriving from the above-mentioned installations, when in operation, represent a subject of classification and are to satisfy the requirements of Part B of the «Rules for the classification of ships», hereafter referred to simply as the «TASNEEF Rules for ships».

Unless expressly stated otherwise, the relevant requirements of the various Parts of the above-mentioned TASNEEF Rules for ships and/or those of other TASNEEF Rules or Requirements apply, as far as practical.

These Rules deal with the determination of scantlings of lifts and escalators and associated equipment, as well as with the arrangement of safety gear.

The choice of the design criteria and the determination of scantlings of machinery are the responsibility of the Designer, as specified in Chapter 8 and Chapter 12, for lifts and escalators, respectively.

TASNEEF tests the machinery, as specified in 1.1.6, and ascertains its suitability by means of working tests on board.

Existing installations for which the Interested Parties apply for the issue of the certification by TASNEEF are to comply with these Rules, as far as deemed necessary by TASNEEF and according to the procedures mentioned in 1.1.7.

Checks and provisions additional to those specified in these Rules may be required for special installations or for those of novel type.

1.1.2 Certification and its validity

For installations complying with these Rules, TASNEEF issues a Qualification Certificate stating the above-mentioned compliance. The validity of the Qualification Certificate is 5 years.

When a three months extension of the period of class has been granted to the ship due to exceptional circumstances (as per [1.2.3] of Part A, Chapter 2, Section 3 of TASNEEF Rules for ships), TASNEEF may grant an extension not exceeding three months to allow for completion of the renewal survey provided that the lift is attended and the attending Surveyor(s) so recommend(s) after the following have been carried out:

- a) Annual survey;
- b) Progression of the renewal survey as far as practicable;

The certificate is issued subject to the satisfactory outcome of the initial survey, and its validity over time is subject to the results of the tests and checks mentioned in Chapters 11 and 12 for lifts and escalators, respectively.

In the five-year period of validity, five annual surveys are to be carried out. The first to fourth annual surveys have a six-month window, i.e. from three months before to three months after each anniversary date, while the fifth annual survey has only a three-month window, i.e. from three months before to the fifth anniversary date.

At the request of the Interested Parties, the Qualification Certificate for escalators may include a statement of compliance with Standard EN 115.

A condition for qualification is that the lift or escalator is used in an appropriate manner, and in any case in compliance with the operating prescriptions established by the Designer and/or the Manufacturer, and that the lift/escalator and its components are kept in good operating condition by means of regular maintenance performed by competent personnel.

1.1.3 Equivalence of requirements and exceptions

In general, the criterion of equivalence of requirements is accepted; therefore, requirements as well as design and installation criteria complying with other standards recognised as equivalent to those contained in these Rules may be accepted, except when otherwise provided by national laws or international conventions.

Similarly, equipment complying with national or international standards may, in general, be accepted as equivalent, provided that it is suitably certified.

The judgement on such equivalence pertains exclusively to TASNEEF, which reserves the right to require compliance with certain conditions for acceptance, when deemed necessary.

TASNEEF may, at its discretion, grant exemption from certain requirements, when they do not appear to be reasonable; any such decision on the part of TASNEEF will be final.

Cap. 1 – GENERAL REQUIREMENTS AND FIELD OF APPLICATION

1.1.4 Calculation methods

As far as examination of the design plan is concerned, the calculations relevant to the determination of scantlings of structures and of different components (cables, cable terminals, stay bolts, etc) are generally required to be submitted.

Calculations are to be carried out according to methods recognised as suitable in the field of strength of materials.

When, in design calculations, electronic data processing is used, adequate information on programs and criteria adopted is to be supplied, in order to facilitate checking of the design.

1.1.5 Modification of systems and/or installations

When modifications are made to systems and/or installations certified by TASNEEF, the Interested Parties are to give timely communication and the relevant work is to be carried out to the satisfaction of TASNEEF and under the supervision of its Surveyors. To this end, if deemed necessary by TASNEEF, the plans relevant to the modifications, along with a detailed description thereof, are to be submitted to TASNEEF for examination.

1.1.6 Testing

As far as the use of materials, objects, devices, machinery, etc is concerned, the requirements of Chapter 2 of Part A of the TASNEEF Rules for ships apply, as far as practical.

In general, testing is required for the following components:

- (a) materials (plates and/or sections) used for guide rails, for main structural components of the car and of the counterweight frame, for supporting frames of the headroom pulleys and wire terminals (mechanical tests);
- (b) starters and electrical panel of lift installations (this consists of checking the suitability for use of type approved components, a voltage application test and an operational test; the voltage application test is to be carried out before installation on board);
- (c) fire doors (this consists of checking compliance with the door type required);
- (d) hydraulic unit, ram and cylinder in the case of hydraulic lifts. Testing here consists of:
 - check of compliance with the approved plans;
 - examination of the certificates of origin of materials;
 - hydrostatic test;
- (e) Wire ropes (according to Pt D, Ch 4, Sec 1 of the TASNEEF Rules for ships);
- (f) Wire terminals. The testing consists of breaking test on one sample per lot and tension test on each lot item; in the case of a tension test on each lot item certified on the Manufacturer's works' certificate, it is to be repeated as a spot check in the presence of the TASNEEF Surveyor.

Internal workshop certificates may be accepted for:

- terminals and winch frame materials;
- pulleys, pulley pins and winch shaft materials;
- electric motor;
- components of hydraulic systems;
- electrical panel for operation of escalators;

- materials for frame of escalators.

1.1.7 Existing installations

- (a) Where the Interested Parties apply for the certification of an existing arrangement, the procedure specified in points (1), (2) and (3) below is to be followed.
 - (1) The calculations relevant to the proposed arrangement are to be submitted to TASNEEF, along with working plans necessary to verify such calculations, with specification of the characteristics of materials employed. If the original documentation is not available, plans drawn up based on measurements carried out directly on board may be accepted as an alternative.
 - (2) Moving parts of the installation are to be subjected to a tensile proof test, as per these Rules.
 - (3) A complete survey is to be made of the entire arrangement and of the associated surrounding structure. Such survey is generally to include the checks and tests mentioned in Chapters 11 and 12 for lifts and escalators, respectively. It is to be specified on the certificate issued that this is an existing installation.
- (b) At the request of the Interested Parties, in the case of existing arrangements TASNEEF may carry out checks other than those specified in (a) and issue a special statement declaring the checks carried out and the outcome.

1.2 DEFINITIONS

1.2.1 Administration

For vessels flying the , it is the competent Ministry of the government of the Italian Republic; for other vessels it is the government of the flag State.

1.2.2 Buffer

It is a resilient stop at the end of travel, comprising a means of braking using fluids or springs (or other similar means).

1.2.3 Lift

It is permanent lifting equipment serving defined deck landing levels, comprising a car suspended by cables or chains or by cylinder-ram units, whose dimensions and means of construction clearly permit the access of persons, running at least partially between rigid vertical guide rails or rigid guide rails whose inclination to the vertical is less than 15°.

1.2.4 Traction drive lift

It is a lift whose lifting cables are driven by friction in the grooves of the driving sheave of the machine.

1.2.5 Positive drive lift

It is a lift suspended by chains or lifting cables driven by means other than friction.

1.2.6 Re-levelling

It is the operation, after the lift has stopped, to permit the stopping position to be corrected during loading or unloading, if necessary by successive movements.

Cap. 1 – GENERAL REQUIREMENTS AND FIELD OF APPLICATION

1.2.7 Maritime authority

For vessels flying the flag, it is the local office of the Administration (Maritime district office, Harbour office, Maritime sub-district office, etc); for other vessels it is the competent port authority.

1.2.8 Lift car (Car)

It is the part of the lift which carries the persons to be transported.

1.2.9 Breaking load of a lifting cable

It is the effective breaking load obtained in a rupture test on a sample of cable following a defined method.

1.2.10 Safety cable

It is an auxiliary cable attached to the car and the counterweight for the purpose of tripping safety gear in case of suspension failure.

1.2.11 Lift well (Well)

It is the space in which the car and the counterweight, if any, travel. This space is bounded by the bottom of the pit, the walls and the roof of the well.

1.2.12 Pit

It is the part of the well situated below the lowest landing level served by the car.

1.2.13 Toe guard (Apron)

It is a protection having a smooth vertical part extending downwards from the sill of the landing or car entrance.

1.2.14 Guide rails

They are the components which provide guiding of the car sling or the counterweight, if any.

1.2.15 Sling

It is the metal framework carrying the cabin or counterweight, connected to the means of suspension. This sling may be integral with the car enclosure.

1.2.16 Interested Parties

They are the parties interested in TASNEEF's intervention, such as the Shipowner or his legal representative, the Shipyard or the Manufacturer.

1.2.17 Overspeed governor

It is a device which, when the lift attains a predetermined speed, causes the lift machine to stop, and, if necessary, causes the safety gear to be applied.

1.2.18 Levelling

It is the operation which improves the accuracy of car stopping at landings.

1.2.19 Pulley room

It is a room not containing the machine, in which pulleys are located and in which the overspeed governor or governors and electrical equipment may also be housed.

1.2.20 Lift machine

It is the unit including the motor which drives and stops the lift.

1.2.21 Safety gear

It is a mechanical device for stopping, and maintaining stationary on the guide rails, the lift car or counterweight

in case of overspeeding in the downward direction or breaking of the suspension.

1.2.22 Instantaneous safety gear

It is safety gear in which the full gripping action on the guide rails is almost immediate.

1.2.23 Instantaneous safety gear with buffered effect

It is safety gear in which the full gripping action on the guide rails is almost immediate, but the reaction on the car or counterweight is limited by the presence of an intermediate buffering system.

1.2.24 Progressive safety gear

It is safety gear in which deceleration is carried out by a braking action on the guide rails and for which special provision is made so as to limit the forces on the car or counterweight to a permissible value.

1.2.25 Passengers

They are the persons transported by a lift.

1.2.26 Rated load

It is the load for which the equipment has been built and for which normal operation is guaranteed by the vendor.

1.2.27 Machine room

It is the room in which machine or machines and/or associated equipment are placed.

1.2.28 Escalator

It is an electrically powered moving staircase for carrying passengers and crewmembers up or down. For the definitions of parts of escalators see Standard EN 115.

1.2.29 Available car area

It is the area of the car measured at a height of 1 m above floor level, disregarding handrails, if any, which is available for passengers during operation of the lift

1.2.30 Surveyors

They are the Surveyors acting on behalf of TASNEEF and entrusted with tasks related to certification.

1.2.31 Vessels

They are ships and non-self-propelled craft. Unless otherwise specified, the term «ship» is intended to mean both ships proper and non-self-propelled craft.

1.2.32 Rated speed

- a) in the case of lifts: it is the speed of the car for which the equipment has been built and for which normal operation is guaranteed by the vendor;
- b) in the case of escalators: it is the speed in the direction of travel of the steps when the installation is operating without a load, stated by the Manufacturer, and on the basis of which the escalator has been designed to operate.

1.2.33 Unlocking zone

It is the zone, extending above and below the stopping level, in which the car floor must be so as to enable the corresponding landing door to be unlocked.

Cap. 2 – DESIGN CRITERIA OF LIFTS AND ESCALATORS

2.1 GENERAL

The design is to consider both the case of a moving lift/escalator and the case of a stationary lift/escalator.

In service conditions, the following forces are to be considered as acting on the lift/escalator:

- (a) the force due to the weight of the car/escalator and the counterweight, if any (only for lifts);
- (b) the force due to the mass of persons and their luggage (rated load);
- (c) the forces due to ship and lift/escalator motion.

In stationary conditions, the forces acting are:

- (d) the forces due to the weight of the car/escalator and the counterweight, if any (only for lifts);
- (e) the forces due to ship motion.

Scantlings obtained on the basis of direct calculations performed using criteria other than those given in 2.3, 2.4 and 2.5 may be accepted provided that they are deemed equivalent by TASNEEF, at its sole discretion.

2.2 MASSES

2.2.1 General

The load acting on bearing devices is that due to the weight of the car/escalator; such mass is to be clearly indicated on the plans submitted for examination, along with the design load (rated load), and only for lifts, the minimum stopping distance, the type and characteristics of buffers and any other element suitable for the correct interpretation of the design.

2.2.2 Lift installations

The design rated load is, in no case, to be taken less than specified in Table 2.1 depending on the available car area and on the maximum number of persons.

The maximum number of persons that can be transported is the number obtained by dividing the rated load given in Table 2.1 by 75 (the result being rounded down to the nearest whole number) or the number obtained from Table 2.2, whichever is the lesser.

The car area in general shall be measured according to the criteria given in Standard EN-81.

In particular, where there is an available area between the entrance frame uprights, when the doors are closed the following applies:

- a) where the area is less or equal than 100 mm deep up to any door panel (including fast and slow doors in the case of multi-panel doors), then it shall be excluded from the floor area;
- b) where the area is greater than 100 mm deep, the total available area shall be included in the floor area.

2.3 DYNAMIC FORCES

The dynamic forces due to lift/escalator movements and ship motion are those deriving from the accelerations calculated in accordance with Part B, Chapter 5, Section 3 of the TASNEEF Rules for ships under the following conditions, assuming ship motions as acting simultaneously:

(a) in the case of moving lift/escalator:

- rolling acceleration α_R , as defined in [2.4.1] of Part B, Ch 5, Sec 3, assuming, $A_R = 10^\circ$ e $T_R = 10$ s;
- pitching acceleration α_P , as defined in [2.5.1] of Part B, Ch 5, Sec 3, assuming $A_P = 7,5^\circ$ e $T_P = 7$ s;

(b) in the case of stationary lift/escalator:

- rolling acceleration α_R , as defined in [2.4.1] of Part B, Ch 5, Sec 3, assuming $A_R = 22,5^\circ$ e $T_R = 10$ s;
- pitching acceleration α_P , as defined in [2.5.1] of Part B, Ch 5, Sec 3, assuming $A_P = 7,5^\circ$ e $T_P = 7$ s;
- heaving acceleration α_H , as defined in [2.3.1] of Part B, Ch 5, Sec 3.

In addition, in order to take account of dynamic forces due to tripping of safety gear for lift stopping, the weight and the rated load are to be multiplied by a dynamic factor F_d , whose value depends on the speed, minimum stopping distance and buffers employed; such factor is to be clearly specified and justified by the Designer. TASNEEF reserves the right to increase the above-mentioned dynamic factor whenever deemed appropriate in relation to the calculations submitted for its determination.

Cap. 2 – DESIGN CRITERIA OF LIFTS AND ESCALATORS

TABLE 2.1

Maximum available car area, in m ²	Maximum number of persons [1]	Rated load, in kg
0,37	1	100
0,58	2	180
0,70	3	225
0,90	4	300
1,10	5	375
1,17	5	400
1,30	6	450
1,45	7	525
1,60	8	600
1,66	8	630
1,75	9	675
1,90	10	750
2,00	10	800
2,05	11	825
2,20	12	900
2,35	13	975
2,40	13	1000
2,50	14	1050
2,65	15	1125
2,80	16	1200
2,90	16	1250
2,95	17	1275
3,10	18	1350
3,25	19	1425
3,40	20	1500
3,56	21	1600
3,88	24	1800
4,36	28	2100
5,00 [2]	33	2500

NOTES:

[1] The maximum number of persons is obtained by dividing the value of the rated load, given in the third column, by 75 and rounding down the result to the nearest whole number.

[2] Over 2500 kg, add 0.16 m² for each extra 100 kg.

TABLE 2.2

Capacity in persons	Minimum available car area in m ²	Capacity in persons	Minimum available car area in m ²
1	0,28	11	1,87
2	0,49	12	2,01
3	0,60	13	2,15
4	0,79	14	2,29
5	0,98	15	2,43
6	1,17	16	2,57
7	1,31	17	2,71
8	1,45	18	2,85
9	1,59	19	2,99
10	1,73	20 [1]	3,13

NOTE:

[1] For more than 20 passengers add 0,115 m² for each extra passenger.

Cap. 2 – DESIGN CRITERIA OF LIFTS AND ESCALATORS

2.4 STRESSES INDUCED BY DYNAMIC FORCES FOR LIFTS

By way of information, some formulae are given below, which permit approximate assessment of the buckling stresses σ_k , in N/mm², in guide rails, caused by tripping of safety gear (during the gripping action of the gear):

- For instantaneous safety gear (not of the captive roller type):

$$\sigma_k = \frac{50 (P + Q) \omega}{n A}$$

- For instantaneous safety gear of the captive roller type:

$$\sigma_k = \frac{30 (P + Q) \omega}{n A}$$

- For progressive safety gear:

$$\sigma_k = \frac{20 (P + Q) \omega}{n A}$$

In the above formulae:

P = value, in kg, given by the sum of the mass of the empty car and the masses of the parts of flexible cables and of compensating gear, if any, supported by the car;

Q = rated load, in kg;

n = number of guide rails;

A = cross-sectional area of the guide rails, in mm²;

ω = increasing factor, to take account of buckling, depending on the slenderness ratio λ ;

$\lambda = l/i$, where **l** is the maximum span between the fixings and **i** is the minimum radius of inertia of the cross-section of the guide rail.

The stresses σ_k are to not exceed the permissible values σ_{amm} mentioned under 2.5.

For the calculation of the bending, buckling and torsional stresses and the calculation of the deflections of the guide rails, the formulae given in Standard EN-81 may be used.

2.5 PERMISSIBLE STRESSES AND DEFLECTIONS

For calculations carried out according to traditional beam theory, the values of the permissible stresses σ_{amm} and τ_{amm} , in N/mm², and of the permissible deflection ϵ_{amm} , in mm, relevant to the two conditions mentioned under 2.1, are the following:

$$\sigma_{amm} = R_m/S_t$$

$$\tau_{amm} = \sigma_{amm}/(3)^{0.5}$$

$$\epsilon_{amm} = 0,0017 L, \text{ for the car;}$$

$$\epsilon_{amm} = 0,0025 L, \text{ but in no case to be taken greater than 5 mm, for guide rails;}$$

$$\epsilon_{amm} = 0,00133 L \text{ mm, for truss of escalators applying a static structural rated load of 5 kN/m}^2 \text{ to the whole load carrying area (nominal width of escalator multiplied by the distance between the supports);}$$

where:

R_m = tensile strength of the material, N/mm²;

S_t = safety coefficient, which is to be taken as follows:

- 2,25 for load condition during normal operation,
- 1,8 for load condition during safety device operation and during navigation with lift out of service,

L = span between the supports, in mm.

The above-mentioned permissible stresses apply to steels having a ratio of minimum yield stress to ultimate tensile strength not exceeding 0,7. Steels having values of such ratio exceeding 0,7 will be specially considered by TASNEEF.

Cap. 3 – DESIGN CRITERIA OF LIFTS AND ESCALATORS

3.1 LIST OF REQUIRED DOCUMENTS

3.1.1

The documentation listed in the following paragraphs is to be submitted for approval:

- (a) General arrangement plan of the installation, with specification, inter alia, of the location of the installation on board the vessel, the well top clearances and the pit clearances, the accessible spaces, if any, under the pit, the ventilation openings, the layout of the lift machine space and pulley room, and the minimum distances between the lift car, counterweight and lift well.
- (b) Plan of the lift car, with specification of its centre of gravity and point of suspension or of thrust (for direct acting hydraulic lifts) in relation to the position of the guide rails.
- (c) Working plan including:
 - (1) lift car and counterweight guide rails with associated attachments and guide shoes, counterweight frame,
 - (2) car frame structure,
 - (3) arrangement and dimensions of pulleys,
 - (4) attachment device of cables, and components for connection to the structure,
 - (5) winch supporting frame, diverter pulleys and associated pins,
 - (6) number and scantlings of suspension cables with indication of the minimum breaking load,
 - (7) constructional details of the connection of guide shoes and of safety gear to the car frame,
 - (8) cylinder and hydraulic ram, base of the cylinder (in the case of hydraulic systems);

3.1.2

One copy of the documentation listed in the following paragraphs is to be submitted for information purposes:

- (a) Design calculations, with specification of the characteristics of materials employed and all elements needed to verify that the components of the plant and the proposed installation are in compliance with these Rules.
- (b) Check of stability in respect of slipping of the cables on the traction sheave.
- (c) Calculation of the winch and associated supporting frame.
- (d) Calculation of the scantlings of the cylinder, ram and base of the bottom of the pit (for hydraulic systems);
- (e) Calculation of maximum pressure (for hydraulic systems).

In addition, the following documents are to be made available for examination by the TASNEEF Survey in charge of testing:

- 1) Scheme of the safety system (safety gear), with relevant technical features.
- 2) Scheme of electrical and/or hydraulic installations.
- 3) Calculation of short-circuit currents in significant points, in order to check the characteristics of protection devices.
- 4) Test certificate for motors.

- 5) Certificate attesting fire resistance of well enclosure walls and landing doors, if required.
- 6) Certificate relevant to the adjustment of the safety gear performed according to instructions supplied by the Manufacturer and calculation of spring compression, in the case of instantaneous safety gear with buffered effect.
- 7) Schemes of safety systems and their descriptive specifications, or, alternatively, certificates relevant to type-recognition issued in compliance with the provisions of Standard EN 81, concerning:
 - clamping device,
 - safety gear,
 - overspeed governor,
 - buffers, of the energy dissipation or energy accumulation type with non-linear characteristic,
 - control valve (for hydraulic lifts).

The above-mentioned devices are to be constructed using corrosion-resistant materials or materials suitably treated to this end.

Cap. 4 – CONSTRUCTION CHARACTERISTICS OF THE INSTALLATION FOR LIFTS

4.1 LIFT CAR

4.1.1 General

The car is to be constructed of steel or other material equivalent to steel as far as fire protection is concerned. The car is to be completely enclosed by walls, floor and roof; the only openings permitted are those listed in the following points:

- (a) openings for the normal access of persons;
- (b) trapdoors and/or emergency doors;
- (c) ventilation openings.

The car floor is to be of anti-slip type.

A suitable handrail is to be fitted within the car.

During service, the car is to be suitably and permanently lighted, or is to be fitted with a system providing for its lighting upon opening of a landing door and until the last person has left the car.

In the event of power loss, emergency lighting is to be ensured.

The car guide shoes may be of cast iron, on condition that an intermediate steel guiding system is provided, suitable to restrain car motions in the event of breaking of one of the guide shoes.

A plate is to be affixed within the car indicating the rated load, in kg, and the maximum number of persons that may be transported.

4.1.2 Strength

All car walls, and doors in closed position, are to be able to resist, without permanent deformation greater than 1 mm and without undergoing an elastic deformation greater than 15 mm, the action of a 300 N force evenly distributed over an area of 500 mm², applied at right angles at any point of the walls or doors, from the inside of the car towards the outside.

After the above-mentioned test the door function is to not be affected.

The car roof is to be able either:

- 1) to support two persons i.e. able to resist a vertical force of 2000 N at any position without permanent deformation and, furthermore, is to provide at one point a clear plane area for standing of at least 0,12 m², in which the lesser dimension is to be at least 0,25 m; or
- 2) to support the maximum number of persons as indicated in Standard EN 81-20 (5.2.5.7.1), i.e. able to resist a vertical force of 2000 N at any position on an area of 0,30 m x 0,30 m without permanent deformation.

4.1.3 Access doors

Access doors are to have a minimum height of 2 m, measured from deck.

The car doors, when closed, apart from operating clearances, if any, are to completely close the car entrances. When closed, the clearance between car door panels, or between car door panels and uprights, lintels or sills is generally not to exceed 6 mm. This value, due to wear, may reach 10 mm, with the exception of doors made from glass.

Doors are to be fitted with devices preventing their premature closure or their slamming. Manually operated doors may be two-panel hinged doors or multi-panel horizontally sliding doors.

Perforated panel doors are not allowed. Multi-panel power operated doors are to be fitted with devices to prevent injury to persons; such devices are to comply with the requirements of the following items:

- 1) they are to be fitted on the entrance edge of each car and of the landing door;
- 2) they are to extend over the whole height of the car entrance edge, beginning 25 mm above the sill;
- 3) the force necessary to manoeuvre such devices is not to exceed 150 N. In the case of dragging of fire doors, the above-mentioned force, if necessary, may be suitably increased;
- 4) they are to trip immediately the entrance edge of the car or of the doors is obstructed. They must react as soon as the car entrance or the landing doors are obstructed.
- 5) Necessary measures are to be taken in order to enable the exit of passengers in the event of untimely stopping of the car in front of a landing.

4.1.4 Clearances between car and inner surface of well, and between car and counterweight

In general, the horizontal distance between the inner surface of the lift well and the framework of the car door is not to exceed 150 mm.

Distances greater than 150 mm may be accepted provided that the car is fitted with a mechanical locking device so that the door can only be opened in the landing door locking zone. Operation of the lift is to be impossible unless the corresponding car door is locked. This locking is to be controlled by an electrical safety device in compliance with the provisions of Standard EN 81.

The distance between the car sill and the sills of landing doors is not to exceed 35 mm.

The horizontal distance between the car door and the landing doors, when closed, is not to exceed 120 mm.

The clearance between car and counterweight is to be at least 50 mm.

4.1.5 Ventilation

Cars having blank doors are to be fitted with upper and lower ventilation openings such as to form a cross-sectional area for air flow not less than 1% of the available car area.

In calculating such flow area, the door clearances may be appropriately considered.

4.2 GUIDE RAILS

4.2.1

Lifts are to be fitted with at least two steel guides, suitably smoothed, which ensure the correct travel of the car and counterweight. The extent of guide rails is to be such as to prevent guide shoes from running out even when the final travel limits are exceeded.

Cap. 4 – CONSTRUCTION CHARACTERISTICS OF THE INSTALLATION FOR LIFTS

The strength of guide rails, their attachments and connecting arrangements of the components is to be sufficient to resist the forces due to tripping of the safety gear, and resist the bending generated by eccentric loads and by accelerations of ship; the degree of stresses and deflections is not to exceed the permissible values mentioned in 2.5 of Chapter 2, for the service conditions considered.

4.3 COUNTERWEIGHT

The counterweight is generally to be constructed of a single metal block, or may be composed of different metallic sections, provided that these are firmly connected to the containment structure.

If the counterweight is not constructed of a single metal block, necessary arrangements are to be made in order to prevent the displacement of the different sections, such as the use of a containment frame or, for lifts having a speed not exceeding 1 m/s, the use of at least two tie rods connecting the blocks.

The counterweight is not allowed in the case of drum winches.

The use of counterweights made of cement blocks is prohibited.

The counterweight is to be guided by at least two rigid steel guide along the whole length of its normal travel and extra-travel, if any, and is to be fixed and supported by means of a special device, in the event of breaking of the suspension system. Alternatively, the well structure is to have such dimensions as to resist the free fall of the counterweight from the highest point of its travel.

Pulleys, if any, on counterweights, are to also be fitted with devices to prevent suspension cables from leaving pulleys, in the event of their becoming slack, and to prevent the introduction of foreign objects between cable and pulley.

The above-mentioned devices are not to hinder examination and maintenance operations of pulleys.

In the case of chain suspensions, similar arrangements are to be provided.

Counterweights are to be installed in the same well as the car and are to be arranged or protected in such a way as to be accessible only to authorised personnel.

4.4 LIFT WELL ENCLOSURES AND LANDING DOORS

4.4.1 Well enclosures

Well enclosures are to be completely closed, except as specified below, and to be suitably ventilated by independent ducts; furthermore, they are to comply, as far as fire protection is concerned, with the relevant requirements contained in Part C, Chapter 4 of the TASNEEF Rules for ships.

A lift well enclosure which serves one or more levels situated in the same 'tweendeck (for example lifts in engine rooms, cargo holds, etc.) may be of the partially enclosed type, provided that what indicated in Standard EN 81-20 (5.2.5.2.2) is fulfilled.

Within well enclosures, only the equipment necessary for lift operation is allowed; piping, electric conductors and cables are to be suitably protected and installed with the utmost care.

The lift well is to be arranged in such a way that smoke passage from one 'tweendeck to another is prevented.

If, in the same well enclosure, two or more lifts are installed, each car, with its associated counterweight, is to be separated from the other(s) over the whole height of the lift well by suitable metallic partitions.

4.4.2 Landing doors

The openings in the boundary bulkheads of the well enclosure are to be closed by doors of construction equivalent to that of the bulkheads and are to be built in such a way as to prevent water entering the well; openings in way of open decks are to be suitably protected.

After closing, doors are to ensure fire protection at least equivalent to that of the well enclosure.

On well enclosure doors which are not fire doors, a fixed hatch having an area not exceeding 600 cm² may be arranged, constructed of armoured glass at least 6 mm thick, in a steel frame, or in a frame of equivalent material.

Power-operated doors shall be multi-panel doors; when possible, central opening doors are to be preferred; manually operated doors may also be one-panel swing doors; they are to be fitted with devices to prevent accidental closing or opening, or sudden slamming.

Landing doors are to be of steel or other equivalent material. Panoramic doors with glass panels shall be considered on the case by case basis.

Landing doors are to have a suitable height and, in general, such a width that the clear passage does not exceed the car entrance width by more than 50 mm on each side.

In general, landing doors are to be horizontally sliding doors, guided both at their lower and upper ends.

A sensitive protection device is to trigger automatic re-opening of the door in the event of a person being struck, or about to be struck, by the door while crossing the entrance during the closing movement.

In doors where closing is carried out under the continuous control of the users (e.g. by continuous pressure of a button), if the kinetic energy exceeds 10 J, the average closing speed of the fastest panel is to be limited to 0,3 m/s.

It is not to be possible, during normal operation, to open a landing door (or one of the panels in the case of a door with more than one panel), unless the car is stationary or is going to stop within the unlocking zone of the door.

The unlocking zone of the door is not to extend by more than 0,2 m above or below the landing level.

However, in the case of a coupled and automatically operated landing door and car door, the unlocking zone may be extended to a maximum of 0,35 m above or below the landing level.

It is not to be possible, in normal service, to operate a lift or keep it operating, if a landing door (or any of its panels, in the case of doors with more than one panel) is open.

Nevertheless, preliminary operations for car movement are allowed.

In case of emergency, and by means of a special key, it is to be possible to open locked doors.

Cap. 4 – CONSTRUCTION CHARACTERISTICS OF THE INSTALLATION FOR LIFTS

4.4.3 Extreme position of car, well top and bottom clearances

The extreme position of car and the well top and bottom clearances are to be in compliance with either:

- 1) the requirements of the following items (a) to (e); or
- 2) the requirements of Standard EN 81-20, paragraphs 5.2.5.6, 5.2.5.7 and 5.2.5.8 as applicable.

When the required well top and bottom clearances cannot be met, in both the above cases, alternative devices providing safety spaces can be accepted provided that an equivalent level of safety is maintained (reference can be made to Standard EN 81/21 as far as applicable).

(a) Well top clearances for traction drive lifts

When the counterweight rests on its fully compressed buffers, the following conditions are to be simultaneously satisfied:

- 1) the car guide lengths are to be such as would accommodate further guided travel, expressed in m, of at least $0,1 + 0,035 V^2$, where V is the rated speed, in m/s;
- 2) the free vertical distance between the level of the highest area on the car roof, having the dimensions specified in 4.1.2, and the level of the lowest parts of the roof of the well, situated in the projection of the roof of the car, is to be at least 0,75 m;
- 3) the free vertical distance, expressed in m, between the lowest parts of the roof of the well and the highest part of the guide shoes or rollers and of the cable attachments, is to be at least $0,1 + 0,035 V^2$;
- 4) the free vertical distance, expressed in m, between the lowest parts of the roof of the well and the highest pieces of equipment fixed on the roof of the car enclosure, except for items detailed in (3), is to be at least $0,3 + 0,035 V^2$;
- 5) above the car there is to be sufficient space to accommodate a rectangular block of at least $0,5 \cdot 0,6 \cdot 0,8$ m, resting on one of its faces. For lifts with direct cabling, the suspension cables and their attachments may be included in this space, provided that no cable is at a distance exceeding 0,15 m from at least one vertical surface of the block

When the car rests on its totally compressed buffers, the counterweight guide rail lengths are to be such as would accommodate further guided travel of the counterweight, expressed in m, of at least $0,1 + 0,035 V^2$.

(b) Well top clearances for positive drive lifts

The travel of the car upwards from the top floor until it strikes the upper buffers is to be at least 0,5 m. The car is to be guided to the limit of its buffer stroke.

When the upper buffers are totally compressed by the car, the following conditions are to be simultaneously fulfilled:

- 1) the free vertical distance between the level of the highest area on the car roof, having the dimensions specified in 4.1.2, and the level of

the lowest parts of the roof of the well situated in the projection of the roof of the car is to be at least 1 m;

- 2) the free vertical distance between the lowest parts of the roof of the well and the highest part of the guide shoes or rollers and of the cable attachments is to be at least 0,1 m;
- 3) the free vertical distance between the lowest parts of the roof of the well and the highest pieces of equipment fixed on the car roof, except for items detailed in (2), is to be at least 0,3 m;
- 4) above the car there is to be sufficient space to accommodate a rectangular block of at least $0,5 \cdot 0,6 \cdot 0,8$ m resting on one of its faces. For lifts with direct cabling, the suspension cables and their attachments may be included in this space, provided that no cable is at a distance exceeding 0,15 m from at least one vertical surface of the block.

When the car rests on its totally compressed buffers, the guide rail lengths of the counterweight, if any, are to be such as would accommodate further guided travel of the counterweight of at least 0,3 m.

(c) Well bottom clearances of electric lifts

The lower part of the well is to consist of a pit, the bottom of which is to be smooth and level, except for any buffer and guide rail bases and bilge wells.

When the car rests on its totally compressed buffers, the following conditions are to be simultaneously fulfilled:

- 1) sufficient space is to be left in the pit to accommodate a rectangular block not less than $0,5 \cdot 0,6 \cdot 0,8$ m resting on one of its faces;
- 2) the free vertical distance between the bottom of the pit and the lowest parts of the guide shoes or rollers and safety gear blocks is to be at least 0,1 m;
- 3) the free vertical distance between the bottom of the pit and the lowest portions of the car, except for items detailed in (2), is to be at least 0,5 m.

A switch is to be arranged in the pit to stop the lift and keep it stationary.

(d) Well top clearances for hydraulic drive lifts

When the ram is in its position of maximum extension, the following conditions are to be simultaneously satisfied:

- 1) the car guide lengths are to be such as would accommodate further guided travel, expressed in m, of at least $0,1 + 0,035 V^2$, where V is the rated speed, in m/s;
- 2) the free vertical distance between the level of the highest area on the car roof, having the dimensions specified in 4.1.2, and the level of the lowest parts of the roof of the well, situated in the projection of the roof of the car, is to be at least 0,75 m;
- 3) the free vertical distance, expressed in m, between the lowest parts of the roof of the well and the highest part of the guide shoes or rollers and of the cable attachments, is to be at least $0,1 + 0,035 V^2$;

Cap. 4 – CONSTRUCTION CHARACTERISTICS OF THE INSTALLATION FOR LIFTS

- 4) the free vertical distance, expressed in m, between the lowest parts of the roof of the well and the highest pieces of equipment fixed on the roof of the car enclosure, except for items detailed in (3), is to be at least $0,3 + 0,035 V^2$;
- 5) above the car there is to be sufficient space to accommodate a rectangular block of at least $0,5 \cdot 0,6 \cdot 0,8$ m, resting on one of its faces. For lifts with direct cabling, the suspension cables and their attachments may be included in this space, provided that no cable is at a distance exceeding 0,15 m from at least one vertical surface of the block;
- 6) the free vertical distance between the lowest parts of the roof of the well and the highest parts arranged at the top of a ram extending upwards is to be not less than 0,1 m;
- 7) in the case of direct acting lifts, the value $0,035 V^2$ mentioned in (1), (3) and (4) is not to be taken into account.

When the car rests on its totally compressed buffers, the counterweight guide rail lengths are to be such as would accommodate further guided travel of the counterweight, expressed in m, of at least $0,1 + 0,035 V^2$.

(e) Well bottom clearances for hydraulic drive lifts

The lower part of the well is to consist of a pit, the bottom of which is to be smooth and level, except for any bases for buffers and the cylinder-ram unit, and for guide rails and bilge wells.

When the car rests on its totally compressed buffers, the following conditions are to be simultaneously fulfilled:

- 1) sufficient space is to be left in the pit to accommodate a rectangular block not less than $0,5 \cdot 0,6 \cdot 0,8$ m resting on one of its faces;
- 2) the free vertical distance between the bottom of the pit and the lowest parts of the guide shoes or rollers and safety gear blocks is to be at least 0,1 m;
- 3) the free vertical distance between the bottom of the pit and the lowest portions of the car, except for items detailed in (2), is to be at least 0,5 m;
- 4) the free vertical distance between the bottom of the pit and the telescopic ram arm under a direct acting lift car is to be not less than 0,5 m.

With the car in its highest position, determined by the complete compression of the buffers in the cylinder-ram unit, the counterweight guide rail lengths, if applicable, are to be such as would accommodate further guided travel of the counterweight, expressed in m, of at least $0,1 + 0,035 V^2$.

A switch is to be arranged in the pit to stop the lift and keep it stationary.

4.4.4 Ventilation

For ventilation of the lift well and of the machine room, at least one air inlet through a suitable intake or duct and one forced extraction device are to be foreseen; the air inlet is to be led into the lift well while the air extraction is to be made from the machine room.

Ducts, if any, for forced air inlet and for extraction are to be directly derived from the fan and are not to serve other spaces and/or rooms on the ship, except as stated below.

Ventilation ducts serving a stairway enclosure may also serve lift wells with associated machine rooms, under the following conditions:

- (a) lift well enclosures and associated machine rooms are enclosed within stairway enclosures;
- (b) landing doors on all decks give direct access to the stairway enclosure;
- (c) ventilation ducts of the stairway enclosure and of the lift well are directly derived from the fan and do not serve other spaces and/or rooms on the ship.

4.5 MACHINE ROOM

4.5.1

The machine room, to be considered as part of the lift well, may be situated laterally of, or (preferably) above, or below the lift well and is to be constructed of steel; furthermore, the boundary with the well is not to have holes which are not strictly necessary for lift movement, for ventilation and for escape hatches.

The dimensions of the machine room are to be sufficient to permit easy and safe access to all components, especially the electrical panel.

In particular there are to be provided:

- (a) a suitable clear horizontal area of at least $0,5 \cdot 0,7$ m, in front of the electrical panels and cabinets;
- (b) a clear horizontal area of at least $0,5 \cdot 0,6$ m, for servicing and inspection of moving parts where this is necessary and, if need be, for manual emergency operation;
- (c) access ways to the clear spaces mentioned under (a) and (b) above, having a width of at least 0,5 m (0,4 m in areas where there are no moving parts).

The clear height of the machine room is to be, in general, at least 1,8 m.

Only lift motors with associated equipment are to be installed in the machine room.

An opening for access to the machine room is to be foreseen, closed by a door fitted with a key-operated locking device; this door is to be capable of being opened from inside the room without the key and to be provided with an automatic closing device.

Lifts without a machine room will be the subject of special consideration and will be examined on a case-by-case basis.

Cap. 5 – SUSPENSION GEAR FOR LIFTS

5.1 REQUIREMENTS FOR SUSPENSIONS

Cars and counterweights are to be suspended from at least two independent lines having one the following configurations:

- two steel wire ropes;
- two chains with parallel links;
- two coated steel belts (CSBs).

Alternatively, the car may be supported by rams or other direct action devices. The coated steel belts characteristics are to comply with the specifications reported on [5.4]. The adoption of CSBs as means of suspension in a lift plant may be accepted only if coupled with an electric discharge rope monitoring system capable of detecting any damage or any impair in the steel wire ropes of the CSBs..

The CSBs installation is to be such that they are always protected from exposure to UV light. The operating temperature of the plant where CSBs are fitted shall be between -10 and +55 °C.

The maximum acceptable operating speed for plant using CSBs is equal to 2.5 m/s.

The CSBs are to be installed and inspected according to the plant manufacturer's instructions.

The steel cables must have a minimum diameter of 8 mm; the tensile strength of the wires and the other characteristics (construction, extension, ovality, flexibility, tests, etc.) shall be as specified in Part D of TASNEEF Rules for ships.

The diameter at groove bottom of traction sheaves, or drums, is to be not less than 40 times the diameter of the suspension cable.

In the case of winding up of cables on drums, the drum is to be helically grooved and is to have such dimensions as to have one layer of cable wound on the drum; when the car rests at its lowest position, on its fully compressed buffers, if any, 1.5 turns of cable are to still remain in the grooves of the drum.

In order that the cable correctly forms the loops, without overlapping, the angle of deflection (fleet angle) of the cables in relation to the drum grooves is not to exceed 4° on either side.

The checking calculation for cables and for CSBs is to be performed for the maximum value of the static tension, and the tensile strength of the cables and of the CSBs is to be such as to guarantee a safety factor of at least:

- 12, in the case of traction drive with three cables or more, drum drive with two cables or more and indirect acting hydraulic lifts;
- 16, in the case of traction drive with two cables only.
- 10, in case of chains.

The junction between the wire rope, the chain or the CSB and the relevant termination is to be able to resist at least 80% of the minimum breaking load of the wire rope, the chain or the CSB.

In addition, for traction drive installations, the stability in respect of slipping of the suspension cables, as specified in 5.2, is to be ensured.

A plate is to be affixed in a suitable position with complete indication of the characteristics of the cables employed; the latter are, in turn, to be fitted with a small plate, duly secured, bearing the same indication.

The other car components connected to the suspensions are to have a safety factor, in respect of breaking

strength of the material with which are made of, of at least 6.

5.2 STABILITY IN RESPECT OF SLIPPING

With regard to stability in respect of slipping, the provisions specified in Standard EN 81-50, paragraph 5.11, are to be complied with.

5.3 DISTRIBUTION OF LOAD BETWEEN THE CABLES OR THE CHAINS

An automatic device is to be provided for equalising the tension of suspension cables or chains, at least at one of their ends.

For chains engaging with sprockets, the ends fixed to the car as well as the ends fixed to the counterweight are to be provided with such equalisation devices.

For chains in the case of multiple return sprockets on the same shaft, these sprockets are to be able to rotate independently.

If springs are used to equalise the tension they are to work in compression.

Protection in the case of abnormal extension, slack rope or slack chain shall be provided as follows:


- in the case of two rope or two chain suspension of the car an electric safety device shall cause the machine to stop in case of abnormal relative extension of one rope or chain;
- for positive drive lifts and hydraulic lifts, if the risk of slack rope (or chain) exists, an electric safety device shall cause the machine to stop when slack occurs.

The devices for adjusting the length of cables or chains are to be made in such a way that they cannot work loose after adjustment.

5.4 REQUIREMENTS FOR CSBs

The coated steel belts consist of a set of parallel steel wire ropes embedded in a matrix of an elastomeric jacket usually with a rectangular cross section.

Examples of the geometrical layouts of CSBs are shown in Fig 1.

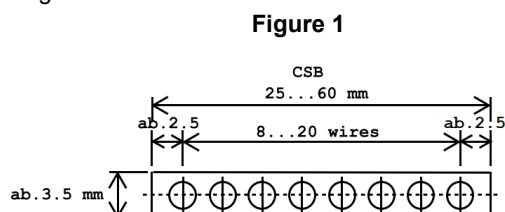

The wire ropes may have different layouts and constructions according to Part D of the TASNEEF Rules for ships. Wire ropes constructions that deviate from standard ones will be evaluated on a case-by-case basis. Wire ropes that are embedded within CSBs are to be tested according to Part D of the TASNEEF Rules for ships.

The matrix of the elastomeric jacket is to have smoke and toxicity such to pass the tests prescribed in IMO FTP Code Part 2.

Cap. 5 – SUSPENSION GEAR FOR LIFTS

The elastomeric jacket used for the construction of the CSBs are to have a salinity resistance such to pass the tests required by the standard ISO 9227.

The elastomeric jacket used for the construction of the CSB is to have an average surface roughness (Ra) at least equal to 0.2 micron on the printed side and to 0.33 micron on the other side; no material removal is allowed.

The assembled CSB is to be finally tested for the ultimate tensile strength on 3 samples of each CSB type. All the tested samples must show results above the rated ultimate tensile strength.

Cap. 6 – MEANS OF ESCAPE FOR LIFTS

6.1 GENERAL

6.1.1

In case of emergency, persons are to be able to exit the lift well and the lift car. The car is to reach the landing level automatically or by manual operation. Such operation is to be carried out applying a force on the adopted device not exceeding 400 N.

6.1.2

In the well of lifts intended for crewmembers, a steel ladder is to be fitted, which is to extend over the whole height of the well, and adequate exits are to be foreseen. Such ladder is to be accessible from the escape hatch fitted on the car roof.

6.1.3

For lifts intended for passengers, a suitable ladder, or equivalent means, is to be foreseen, giving free access to the car roof through any open door of the well. The same ladder or another may be used to enter the car through the opening on the car roof. Such opening is to be not less than 0,35 x 0,50 m and capable of being opened only from outside the car, in passenger lifts, and from both sides, in the case of lift cars intended for crewmember service only. The above-mentioned ladders are to be fitted in a room situated in the immediate proximity of the lift. Access to such room is to be allowed for authorised persons only.

For panorama lifts in an open well, the presence and possible arrangements for the ladder and the opening on the car roof will be considered case by case.

6.1.4

All doors of wells, access and emergency openings, car doors and the upper escape hatch from the car are to be fitted with safety contactors preventing car motion when such openings are not closed.

6.1.5

Suitable plates, along with instructions specifying escape sequences, are to be fitted:

- inside the lift car;
- on the roof of the car;
- inside the lift well, in way of any access opening;
- in the machine room.

6.1.6

Lifts intended for crewmembers only are to be fitted with an escape hatch from the well top, having an area of at least 0,24 m² and a side not less than 350 mm, which is to be capable of being opened from outside only by means of a key kept in proximity of such hatch.

Cap. 7 – CONTROL AND SAFETY DEVICES FOR LIFTS

7.1 GENERAL

Means are to be provided to ensure control of the speed, direction of motion and stopping of the lift.

In addition, a device is to be provided causing the de-energizing of the machine, and keep it de-energized if:

- (a) after the start of the car, the machine does not operate;
- (b) the cabin and the counterweight are hindered in their travel by an object which causes the slipping of the driving system.

Such device is to have the tripping times specified in 7.14 (b) depending on the height of the car travel.

The car position during normal service is to be easily ascertained from inside the car.

Control devices are to be of a type suitable for use on board ships, taking account of the presence of vibrations and of the saline environment.

These devices are to operate satisfactorily even with 10° rolling and pitching conditions, with the lift operating, and are to withstand 22,5° inclinations in all directions with the lift out of service.

In general, the TASNEEF rules for Ships relevant to machinery, systems, electrical installations and devices, protection against electrical failures, controls and priorities, as well as to notices and instructions as per Standards EN 81 are to apply, as far as practical.

7.2 SAFETY GEAR AND OVERSPEED GOVERNOR

The car and the counterweight are to be provided with safety gear controlled by their own overspeed governors capable of operating only in both directions and of stopping a car carrying the rated load and the counterweight, at the tripping speed of the overspeed governor, even if the suspension devices break, by gripping the guide rails, and of holding the car stationary.

The tripping of safety gear by devices which operate electrically, hydraulically or pneumatically is forbidden.

Depending on the rated speed of the car **V**, the relevant safety gear is to be:

- (a) of the progressive type for lifts with rated speed **V** exceeding 0,63 m/s.

The average delay, in case of tripping with the car in free fall, with the rated load in the car, is to be between 0,2 **g** and 1 **g**;

- (b) of the instantaneous type for lifts with **V** not exceeding 0,63 m/s.

If the car carries more than one safety gear device, all of them are to be of the progressive type.

The safety gear of the counterweight is to be of the progressive type if the rated speed exceeds 1 m/s.

The release of the safety gear on the car or counterweight is only to be possible by raising the car or the counterweight, respectively.

Tripping of the safety gear of the car is to cause the lift motor to stop no later than the moment of safety gear tripping.

Tripping of the overspeed governor for the car safety gear is to occur at a speed at least equal to 115% of the rated speed and less than:

- 0,80 m/s, for instantaneous safety gear, except for the captive roller type;

- 1 m/s, for instantaneous safety gear of the captive roller type;
- 1,5 m/s, for progressive safety gear used for rated speeds not exceeding 1 m/s;
- $1,25 \mathbf{V} + 0,25 \mathbf{V}$, for progressive safety gear for rated speeds exceeding 1 m/s.

The response time of the overspeed governor before tripping is to be sufficiently short not to permit a dangerous speed to be reached before the moment of safety gear operation.

The tripping speed of an overspeed governor for the counterweight safety gear is to be higher than that for the car safety gear, though not exceeding it by more than 10%.

The tripping of the speed governor or the breakage or even the slackening of a suspension component is to cause the machine to stop automatically.

The tensile force in the overspeed governor cable produced by the governor, when tripped, is to be not less than the greater of the following values:

- (a) 300 N;
- (b) twice that necessary to engage the safety gear.

The breaking load of the cable of the overspeed governor is to be related to a safety factor of at least 8 times the tensile force produced in the cable when the overspeed governor is tripped.

The cable employed is to be very flexible and is to have a diameter of at least 6 mm; the groove bottom diameter of the pulley of the overspeed governor is to be at least 30 times the diameter of the cable.

The cable is to be tensioned by a guided tensioning pulley.

It is forbidden to use the jaws or safety blocks of safety devices as guide shoes.

In the case of hydraulic lifts, precautions are to be taken against the fall of the car, overspeeding in the downward direction and slow descent, in accordance with the provisions of Standard EN 81.

7.3 BUFFERS

7.3.1 General

Cars and counterweights are to be fitted with buffers at the bottom limit of their travel. If the buffers travel with the car or counterweight, they are to strike against a pedestal at least 300 mm high at the end of the travel. A pedestal is not required for buffer(s) fixed to the counterweight where a screen is extended to not more than 50 mm above the pit floor.

Positive drive lifts are to be provided with buffers on the car top to function at the upper limit of travel.

In positive drive lifts provided with counterweights, these upper buffers are to not function until the counterweight buffers are fully compressed.

Depending on the rated speed of the lift, the following types of buffers are foreseen:

- (a) Energy accumulation type buffers with linear and non-linear characteristic, for lifts with rated speed **V** not exceeding 1 m/s;
- (b) Energy dissipation type buffers, for any rated speed.

7.3.2 Stroke of the buffers

When the buffers mentioned in 7.3.1 (a) are employed, the total possible stroke of the buffers **C**, in m, is to be at

Cap. 7 – CONTROL AND SAFETY DEVICES FOR LIFTS

least twice the gravity stopping distance corresponding to 115% of the rated speed V , in m/s, and therefore the following condition is to be satisfied:

$$C \geq 0,135 V^2$$

In any event, the stroke is to be not less than 65 mm. When the buffers mentioned in 7.3.1 (c) are employed, the total possible stroke of the buffers C , in m, is to be not less than the gravity stopping distance corresponding to 115% of the rated speed V , in m/s, and therefore the following condition is to be satisfied:

$$C \geq 0,0674 V^2$$

Buffers are to be designed to cover the stroke defined above under a static load of between 2,5 and 4 times the sum of the mass of the car and its rated load, or of 4 times the mass of the counterweight.

The average retardation due to buffer action on the car with the rated load, in the case of free fall, is not to exceed 1 g, and the maximum retardation is not to exceed 6 g.

The speed of impact on buffers to be considered is that for which the buffer stroke has been calculated.

7.4 FINAL LIMIT SWITCHES

Final limit safety stops for the car, either in upward or downward service, are to be ensured by a special final limit switch which is to be independent of, or in any case not directly controlled by, the driving system.

7.5 CLOSING AND CONTROL DEVICES

The machine is not to be capable of being started until all landing doors are closed and locked.

In the case of manually operated doors, a device is to be foreseen preventing car movement for a period of at least 2 seconds after car stopping.

Each landing door is to be fitted with a locking device controlled by an electrical safety device preventing its opening until the car is stationary in such a position that its floor is not more than 200 mm above or below the relevant landing access treading floor and until the control components of the winch are disengaged. In the case, however, of mechanically operated car and landing doors operating simultaneously, the unlocking zone may extend to a maximum of 0,35 m above and below the landing level.

The operation of the landing levelling device with the landing door open is allowed, within the above-mentioned unlocking zone, provided that the levelling speed does not exceed 0,3 m/s.

Car doors are to be fitted with safety contacts preventing car movement if car doors are not closed, or stopping such movement if such doors are opened during service.

If the car door is fitted with a mechanical device preventing its opening until the car is facing access to the well, it is permissible for the car door to be able to be opened when the car floor is within the unlocking zone of the landing in front of which the car is to stop.

The operation of the landing levelling device with the car door open is allowed within the above-mentioned unlocking zone limit and for the maximum levelling speed specified above.

7.6 CONTROL CIRCUIT CONTACTS

The contacts of car doors and those controlling locking of landing doors are to be by positive separation of the circuit-breaking devices.

The action of safety contacts is to prevent car movement when landing doors are not closed and locked, even if one or more accidental earth contacts occur. If the safety contacts are bipolar, they are to break the two branches of the control circuit of the lifting machine and of the brake contactors; if safety contacts are unipolar, they are to break one branch of the control circuit of the lifting machine and brake contactors, and the other branch is to be earthed.

7.7 CAR UNLOCKING AND EMERGENCY MANOEUVRE

Lifts are to be provided with an arrangement, independent of the lift machine, for unlocking the car in the event of the car stopping in an intermediate position between landings.

All landing doors are to be capable of being opened, independently of the locking and operating system, with a special key given to a specially entrusted person.

The car door is to be capable of being opened from outside, independently of the operating system, when the car is brought in way of the above-mentioned landing doors.

The possibility of starting the car movement is to be excluded even when opening of the landing doors is carried out by means of the above-mentioned special key.

7.8 INDICATING DEVICES

In the case of lifts installed within an enclosed well, when the car is not clearly visible from landings, a device is to be installed signalling, at each landing served by the lift, whether the car is in way of the landing door, if such door is manually operated.

7.9 OPERATING DEVICES

Lift control from outside of the car is to be automatically prevented when the car is occupied, unless a special collective type operating system is foreseen.

7.10 OUT-OF-ORDER LIFTS

In the case of lifts being put out of service for safety reasons, it is to be checked that none of the landing doors can be accidentally opened.

7.11 STOPPING DEVICE AND ALARM SIGNAL

Machinery rooms are to have a general stopping device for each lift to cut off the power supply to the lift on all active conductors. This device is to be capable of cutting off the highest current foreseen for the normal operation of the lift.

For the purpose of obtaining emergency assistance from the outside, the car is to be fitted with a suitable alarm device which is readily identifiable and accessible. This device is to be powered either from the emergency lighting power source or from another source with equivalent characteristics. The alarm is to enable two-way verbal communication and permanent contact with a centralised emergency call out service (see also 9.4).

Cap. 7 – CONTROL AND SAFETY DEVICES FOR LIFTS

7.12 RE-ACTIVATION OF LIFT SERVICE

When the lift is out of service, means of access to the well are to be locked.

Re-activation of the installation, after a stop due to any reason whatsoever, is only to be possible by means of intervention by qualified lift service personnel.

7.13 END OF TRAVEL SAFETY DEVICES

End of travel safety devices are to be fitted, and to be independent and capable of tripping as near as possible to the terminal stopping levels and before the car and counterweight strike the buffers.

7.14 SAFETY DEVICES IN CASE AN OBJECT IS MET DURING DOWNWARD MOTION OF THE CAR OR COUNTERWEIGHT

(a) Positive drive lifts

Positive drive lifts are to be fitted with a device switching off power for lift drive and causing the stopping of the lift motor in the event of slackening of a cable or chain consequent to meeting an object during downward motion of the car or counterweight.

(b) Traction drive lifts and hydraulic lifts

Traction drive and hydraulic lifts are to be fitted with a device causing the stopping of the lift motor and keeping it stationary when:

- the motor does not start after an order;
- the downward motion of the car or counterweight is stopped by an object causing the slipping of cables on sheaves (for traction drive lifts only).

The above-mentioned device is to trip within a time not exceeding the lesser of the two following values:

- 1) 45 s,
- 2) the time necessary for complete travel, increased by 10 s, with a minimum of 20 s, if the travel time is less than 10 s.

The above-mentioned device is not to affect car movement during inspection manoeuvres, or during the emergency electrical manoeuvre, if any.

7.15 BRAKING SYSTEM

7.15.1 General provisions

Electric lifts are to be provided with a braking system which operates automatically both in the event of loss of the main power supply and in the event of loss of the power supply for emergency operation.

The braking system is to have an electro-mechanical brake (friction type); other (e.g. electric) means may only be accepted as additional brakes.

7.15.2 Electro-mechanical brake

The electro-mechanical brake on its own is to be capable of stopping the machine when the car is travelling at its rated speed and with the rated load increased by 25%.

In any operating condition, the tripping of the brake is not to cause a retardation of the car exceeding that resulting from operation of the safety gear or from striking the buffers.

All mechanical components of the brake which contribute to the braking action on the brake drum or disc are to be installed in duplicate and are to be of such dimensions that, when one of these components does not operate on

the brake drum or disc, a sufficient braking action is exerted to retard the travel of the car loaded with the rated load.

The component on which the brake operates is to be directly or mechanically coupled to the traction sheave (or drum, or sprocket).

To hold off the brake, in normal operation, a continuous flow of current is required. The interruption of this current is to be effected by at least two independent electrical devices, whether or not they are integral with those which cause interruption of the current feeding the lift machine.

If, when the lift is stationary, one of the contactors has not opened the main contacts, further movement is to be prevented, at the latest at the next change in the direction of motion.

When the motor of the lift is able to function as a generator, it is not to be possible for the electrical device operating the brake to be fed by the driving motor.

Braking is to become effective without supplementary delay after opening of the brake release circuit (the use of a diode or capacitor connected directly to the terminals of the brake coil is not considered a means of delay).

Any machine fitted with a manual emergency operating device is to be capable of having the brake released by hand and to require a constant effort to keep the brake open.

The brake shoe pressure is to be exerted by guided compression springs or weights.

Braking is to be effected by application on the brake drum or disc of at least two shoes, pads or callipers.

Band brakes are prohibited.

Brake linings are to be incombustible.

Cap. 8 – MACHINERY FOR LIFTS

8.1 GENERAL

The design of machinery is the responsibility of the Designer, as stated in 1.1.1 of Chapter 1.

Machinery is, as far as possible, to comply with recognised standards, to be constructed according to good marine practice and to be designed taking into account the additional loads due to use on board ships.

8.2 DRIVE OF THE CAR AND THE COUNTERWEIGHT

8.2.1 Electric lifts

The drive of the car and the counterweight is to be made:

- a) by traction, by use of sheaves and cables;
- b) by positive drive if the rated speed does not exceed 0,63 m/s, i.e.:
 - (1) either by use of a drum and cables, without counterweight; or
 - (2) by use of sprockets and chains.

The calculations of the driving elements are to take into account the possibility of the counterweight or the car resting on their buffers.

Use may be made of belts for coupling the motor or motors to the component on which the electro-mechanical brake operates. A minimum of two belts are to be used.

In the case of use of overhung sheaves or sprockets, necessary arrangements are to be adopted to prevent cables/chains from leaving the pulleys/sprockets, or the introduction of foreign objects between cables/chains and pulleys/sprockets, where machinery is not situated above the well.

The above-mentioned arrangements are not to hinder examination and maintenance operations for pulleys and sprockets.

8.2.2 Hydraulic lifts

The following two methods of operation are permitted:

- 1) direct acting;
- 2) indirect acting.

If, in order to raise the lift car, several cylinder-ram units are used, they are to be hydraulically interconnected to ensure that the pressure is evenly distributed.

Cap. 9 – ELECTRICAL INSTALLATION FOR LIFTS

9.1 GENERAL

Electrical installations of lifts are to comply, as far as applicable, with the following rules for the construction and installation of lifts:

- *Lift for transport of persons and goods – Passenger and goods passenger lifts* (UNI EN 81-20) and
- *Examinations and tests – Design rules, calculations, examinations and tests of lift components* (UNI EN 81-50).

This is to result from a statement by the Manufacturer, who is to have a Quality System recognised as suitable by TASNEEF. In addition to the above, the requirements contained in the following parts of Chapter 9 are to be complied with.

9.2 ELECTRICAL DEVICES

Electrical devices are to comply with the relevant requirements of IEC standards and with IEC Publication 60092 series concerning electrical installations on board ships.

The electronic components for control, protection and alarm are to be constructed to withstand type tests required in IEC Publication 60092-504; a Statement issued by the Manufacturer may be accepted for this purpose.

9.3 SUPPLY CIRCUITS

Supply circuits are not to be automatically disconnected by means of the progressive disconnection system of non-essential users.

9.4 MEANS OF COMMUNICATION

In all passenger lift cars, a telephone or other means of intercommunication is to be permanently installed, and to always be connected to a permanently attended zone. Such means is to be operable even in the event of loss of the main electrical power supply.

9.5 EMERGENCY POWER SUPPLY

In passenger lifts, the installation is to be operable with the emergency power supply for the time necessary to permit the car to reach the nearest landing to allow passengers to exit.

9.6 ALARM DEVICE

In all cars, an alarm device is to be foreseen, to give an optical and acoustic signal in a permanently attended zone. The alarm is to be supplied by the emergency power source or by a dedicated independent power source.

9.7 EMERGENCY LIGHTING

The car, the well and the machine room are to be lighted by emergency lighting, supplied by the emergency power source, which operates automatically in the event of loss of the main power supply.

9.8 ELECTRICAL SAFETY DEVICES

Installations in proximity of or within dangerous spaces, for example pump rooms, will be subject to special consideration by TASNEEF, as far as the choice of electrical safety devices is concerned.

9.9 OPENING OF THE EMERGENCY ESCAPE HATCH

Opening of the emergency hatch for escape onto the roof of the car is to trigger the interruption of the safety circuit and is to consequently stop the car. The safety circuit is to remain interrupted until the hatch is closed again. Re-activation of service is only to be possible after manual and intentional restoring of the circuit.

9.10 OPENING OF ESCAPE HATCHES TO THE WELL

Opening of escape hatches to the well is to trigger the interruption of the safety circuit, which is to remain interrupted until the hatch is closed again. Re-activation of service is only to be possible after manual and intentional restoring of the circuit.

9.11 INSTALLATION OF ELECTRICAL CABLES IN THE WELL

Only the electrical cables of the lift are to be installed in the well. The cables are to be protected against mechanical damage. Such protection may be obtained by means of a metal duct, without internal roughness, of such width as to allow passage of the freely suspended bend of mobile cables; the duct is to be provided with an opening with rounded edges for passage of the cable from the car.

Cap. 10 – MATERIALS AND WELDED CONNECTIONS FOR LIFTS

10.1 GENERAL

For construction, materials complying with standards or regulations recognised by TASNEEF are to be used; such materials are, in general, to satisfy the requirements and prescriptions relevant to testing laid down in Part D of the TASNEEF Rules for ships.

Welded connections are to be carried out in compliance with the requirements of Part B of the TASNEEF Rules for ships.

Cap. 11 – TESTS AND CHECKS ON BOARD FOR LIFTS

11.1 TESTS TO BE CARRIED OUT AT THE FIRST SURVEY

11.1.1 Electric lifts

After installation, and after any important repair which may affect the safety and strength of the arrangement, following a check of compliance with the plans, the lift is to be subjected, as far as applicable, to the tests and inspections mentioned in Standard EN 81-20, item 6.3 and in particular:

- (a) Measurement of the insulation resistance of electric circuits and check of electrical continuity and earthing;
- (b) Static test: the car, stationary at its lowest position, is to be subjected to an overload corresponding to 50% in excess of the rated load for at least 10 min;
- (c) Test of stopping gear: brakes are to be capable of withstanding an overload of 25%;
- (d) Check of grip, by means of the following:
 - (1) several stops are to be made, with the maximum braking force compatible with the installation, each time making a complete stop of the car.
Stops are to be made:
 - in upward motion, with empty car, in the upper part of travel;
 - in downward motion, with car loaded with 125% of the rated load; in the lower part of travel;
 - (2) it is to be ascertained that the empty car cannot be displaced in upward motion when the counterweight rests on its compressed buffers;
 - (3) the compliance of the balance with the value specified by the lift Manufacturer is to be checked. Such check may be performed by means of the measurement of amperage along with:
 - speed measurement, for alternating current motors;
 - voltage measurement, for direct current motors.
- (e) Car safety gear test: the test is to be performed in downward motion, with held off brake, with rotating winch until slipping or slackening of cables occurs, and in the following conditions:
 - (1) in the case of instantaneous safety gear or instantaneous safety gear with buffered effect, the car rated load is to be evenly distributed and the grip is to occur at the service speed;
 - (2) in the case of progressive safety gear, the car is to be loaded with 125% of the rated load evenly distributed, and grip may be effected at reduced speed, e.g. at the self-levelling speed. In order to facilitate the unlocking of the safety gear, it is recommended that the test should be performed in front of a landing door, in order to unload the car.
- (f) Counterweight safety gear test:
 - (1) in the case of instantaneous safety gear or instantaneous safety gear with buffered effect, the counterweight safety gear which is tripped by an overspeed governor is to be tested in the

same conditions foreseen for the car safety gear without any load in the car;

- (2) the counterweight progressive safety gear which is not tripped by an overspeed governor is to be tested with empty car at the rated speed or a lower speed. After the grip, no failure is to occur which may affect the normal use of the lift (exceptionally, if necessary, all gripping components may be replaced).
- (g) Dynamic test (to be carried out subject to the positive outcome of the test under (f)), consisting of the working test with an overload of 10% in respect of the rated load
- (h) Working test at the design load, with check of satisfactory tripping of all governing and safety devices (locking devices, electrical safety devices, end of travel safety devices, overspeed governors, alarm devices, etc);
- (i) Buffer test:
 - (1) in the case of energy accumulation buffers, the test is to be carried out as follows: the car loaded with the rated load is to rest on the buffer or buffers; then, cable slackening is to be caused and it is to be checked that the deflection corresponds to that resulting from the characteristic curve;
 - (2) in the case of energy accumulation buffers with buffered return movement and energy dissipation buffers, the test is to be carried out as follows: the car loaded with the rated load or the counterweight is to be brought into contact with their buffers, at the rated speed, or at the speed for which the buffer stroke has been calculated, in the case of use of reduced stroke buffers with check of retardation. At the end of the test, no failure is to result which might affect the normal use of the lift.

11.1.2 Hydraulic lifts

As far as they are applicable in addition to the tests and inspections listed above, this type of lift is to be subjected to those stated in Standard EN 81-20, item 6.3 and in particular:

- a) check of stopping of the ram with buffered effect;
- b) measurement of maximum pressure;
- c) check of the correct calibration of the overpressure valve;
- d) check of the stop valve;
- e) check of the clamp device;
- f) check of the cleat device:
 - dynamic test,
 - visual examination,
 - check of the stroke of the buffers,
- g) check of the control valve;
- h) pressure test;
- i) slow descent test.

At the discretion of TASNEEF, the tests mentioned in item 11.1.1 (c), (d), (e), (f), (h) and (i) and in item 11.1.2 (a), (b), (c), (d), (e), (f), (g) and (i) may be carried out directly by the firm performing the installation and certified by the appointed TASNEEF Surveyor.

Cap. 11 – TESTS AND CHECKS ON BOARD FOR LIFTS

11.2 TESTS TO BE CARRIED OUT AT PERIODICAL SURVEYS

11.2.1

Every five years, for the purpose of the renewal of the Qualification Certificate, lifts are to be subjected to the tests mentioned in 11.1.

11.2.2

Lifts are to be surveyed annually for the purpose of ascertaining the satisfactory condition of all components and the correct operation of the devices.

In particular:

- (a) it is to be ascertained that the arrangement of suspensions corresponds to that indicated in the plans and that plates are affixed with the correct indication of lift performance;
- (b) a careful examination is to be carried out of all mobile components, with disassembly, if necessary, at the discretion of the appointed TASNEEF Surveyor, the extent of which will depend on the degree of maintenance of the installation as a whole;
- (c) the tripping of safety devices connected to operation of car and landing doors, and of overspeed devices is to be checked, and the operation of brakes and, in general, of all the above-mentioned devices is to be verified;
- (d) the condition of the well in respect of its integrity, fire resistance and ventilation is to be checked;

- (e) the integrity of all fixed bearing components and guide rail components is to be checked;
- (f) the practicability of the means of escape and the efficiency of emergency devices are to be checked;
- (g) the overload brake test and the lift working test are to be carried out, if deemed necessary, depending on the checks carried out.

At the discretion of TASNEEF, the checks mentioned in (a) and (c) may be:

- carried out directly by the Manufacturer of the installation or by the competent person responsible for maintenance (either authorised by the above-mentioned Manufacturer or approved service supplier or appointed by the owner); and
- certified by the appointed TASNEEF Surveyor, also at times other than when the latter performs the other inspections required.

Such checks may also be performed outside the six-month survey window foreseen for the annual survey. In any event, the competent person in charge is to leave on board the relevant record, which will be verified and collected by the TASNEEF Surveyor appointed to conduct the next round of checks.

Cap. 12 – CERTIFICATION OF ESCALATORS

12.1 APPLICABLE STANDARDS

For the purpose of the issue of the voluntary Qualification Certificate, installations are to comply with the requirements in these Rules and, as far as applicable, those in Standard EN 115 “Safety rules for the construction and installation of escalators and passenger conveyors”, together with the design criteria laid down in items 2.3 and 2.5 of Chapter 2.

12.2 REQUIRED DOCUMENTS

12.2.1

The following documents are to be submitted to TASNEEF in triplicate for approval:

- plan of the layout of the escalator, with specification of its location on board the ship;
- drawings of the escalator truss;
- drawing of the intermediate support, if any.

12.2.2

For information purposes, one copy of the design calculations, is to be submitted to TASNEEF with specification of the characteristics of materials employed and all elements needed to verify that the components of the plant and the proposed installation are in compliance with these Rules, specifically:

- calculation of the truss (or the model of reference with the limits of application);
- technical characteristics;
- list of safety contacts;
- calculation of step chain and main chain;
- calculation of brake and braking distance;
- chain resistance certificate;
- step test certificate;
- certificate for glass in the balustrade, if any;
- test certificate for electrical panel of operation issued by the Manufacturer with specification of the tests performed in accordance with the provisions of the TASNEEF Rules for ships.

12.3 SAFETY DEVICES AND MACHINERY

The safety devices and machinery are to be provided with test certificates issued, respectively, by a suitable testing laboratory and by the Manufacturer, the latter being responsible for the construction of the machinery.

Safety equipment is to be suitable for use in a marine environment.

12.4 ELECTRICAL SYSTEM

The relevant criteria, as far as applicable, are those in Chapter 9 as well as those in Part C, Ch 2 of the Rules.

However, as far as concerns the electrical panel of operation, internal workshop certificates may be accepted.

12.5 MATERIALS AND WELDED CONNECTIONS

The materials and welded connections used for the construction of escalators are to be in accordance with the relevant internal workshop certificates provided that the latter conform to standards or requirements recognised by TASNEEF.

12.6 TESTS AND INSPECTIONS ON BOARD

The tests and inspections to be performed upon installation on board are those laid down in Paragraph 15 of the foregoing Standard EN 115 for assemblies ashore.

12.7 CERTIFICATION

Subject to the satisfactory outcome of the tests and inspections referred to above, TASNEEF will issue a Qualification Certificate.

At the request of the Interested Party, the Certificate will make specific mention of the installation's compliance with Standard EN 115.